JØTUL F 520 / JØTUL F 520 High Top

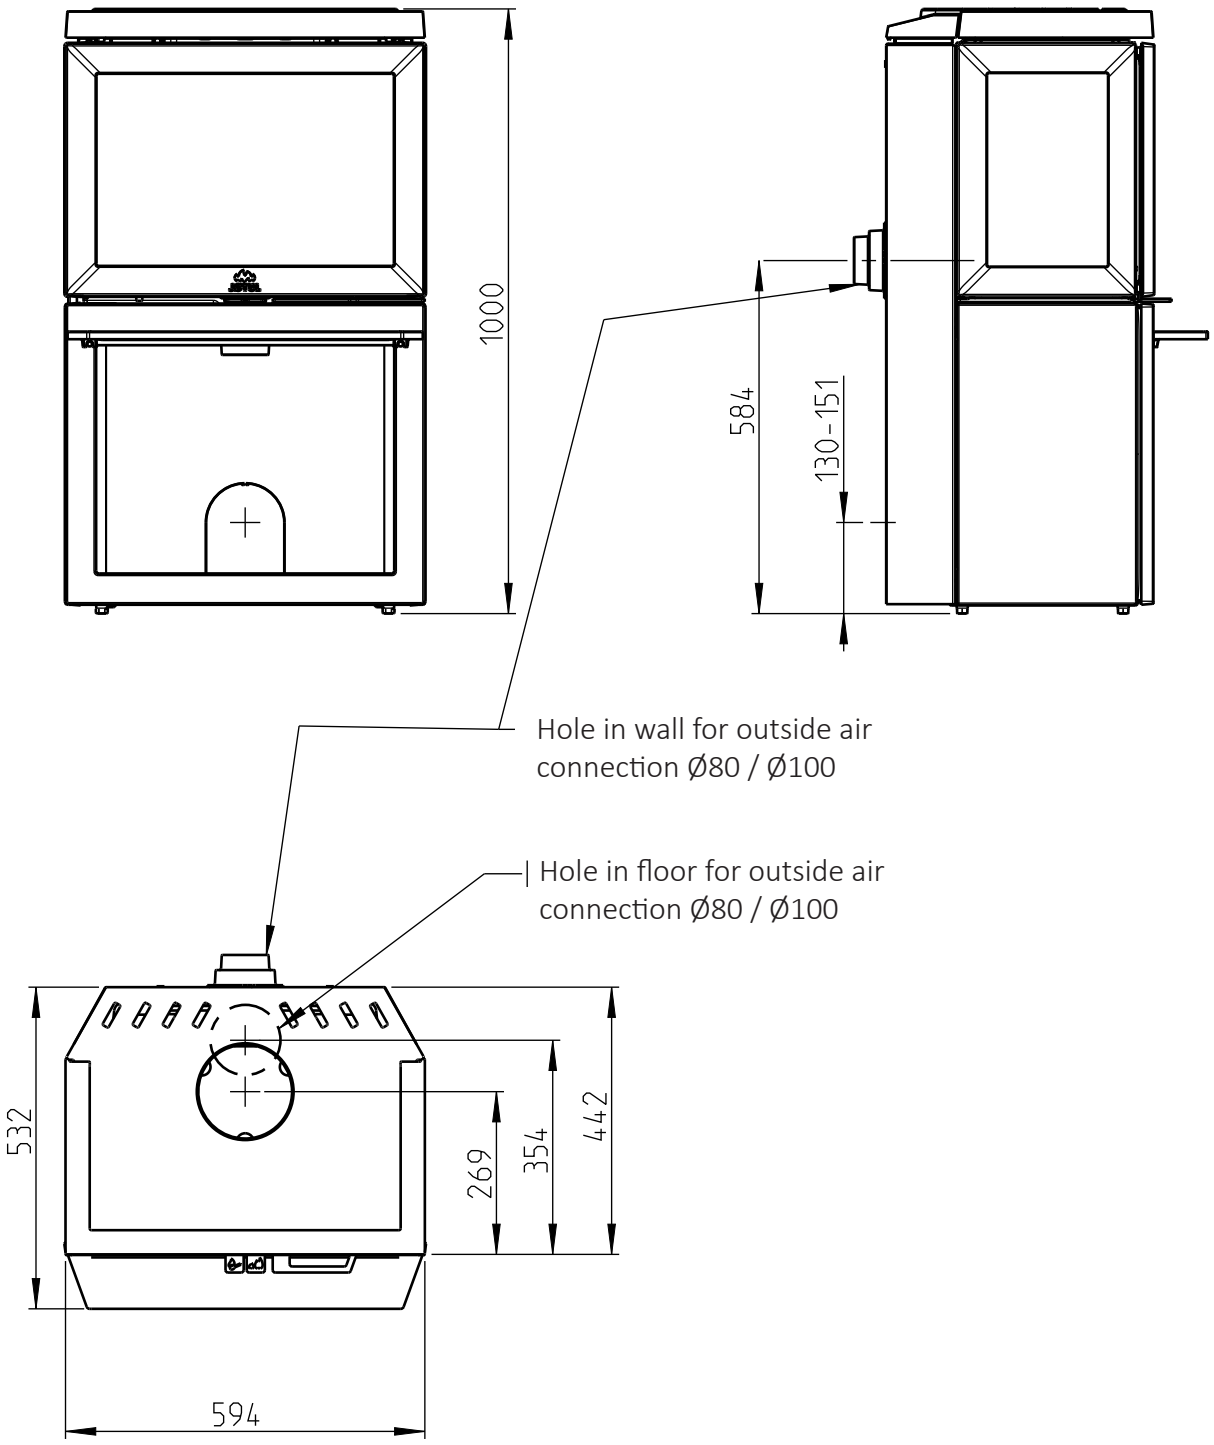

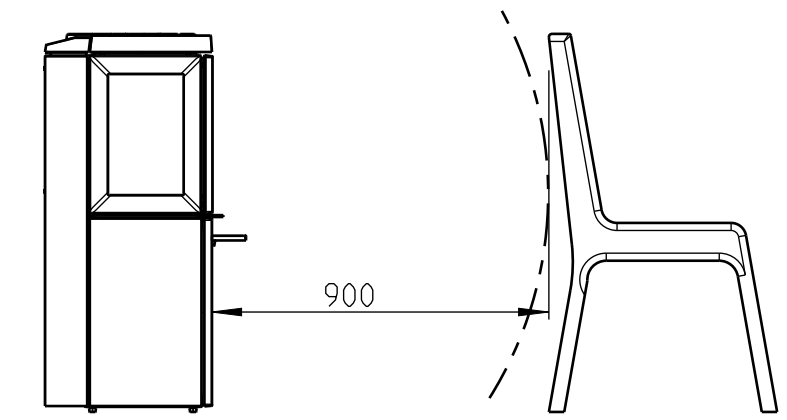

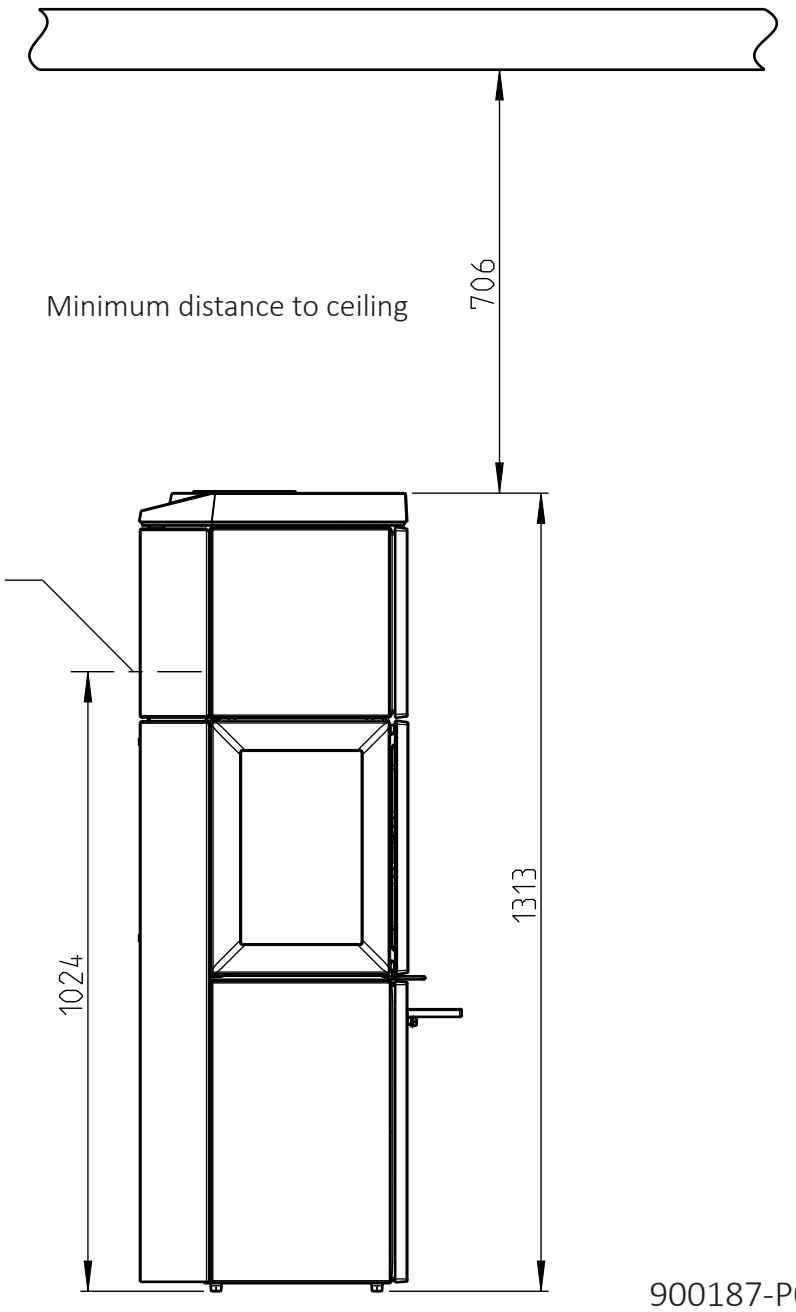

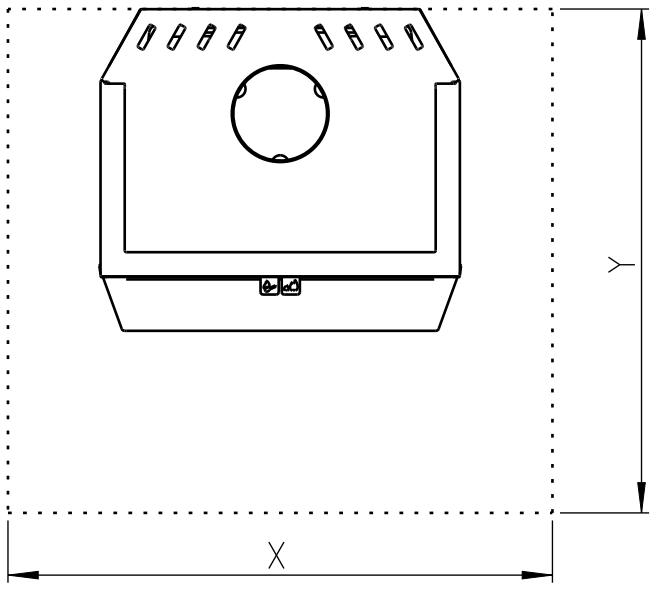

Min. dimensions for floor plate
X/Y = in compliance with national laws and regulations

900187-P06

F 520 /F 520 LB / F 520 HT :

Minimum distance to combustible wall

With semi-insulated chimney/shielded flue pipe all the way down to the product

Combustible wall



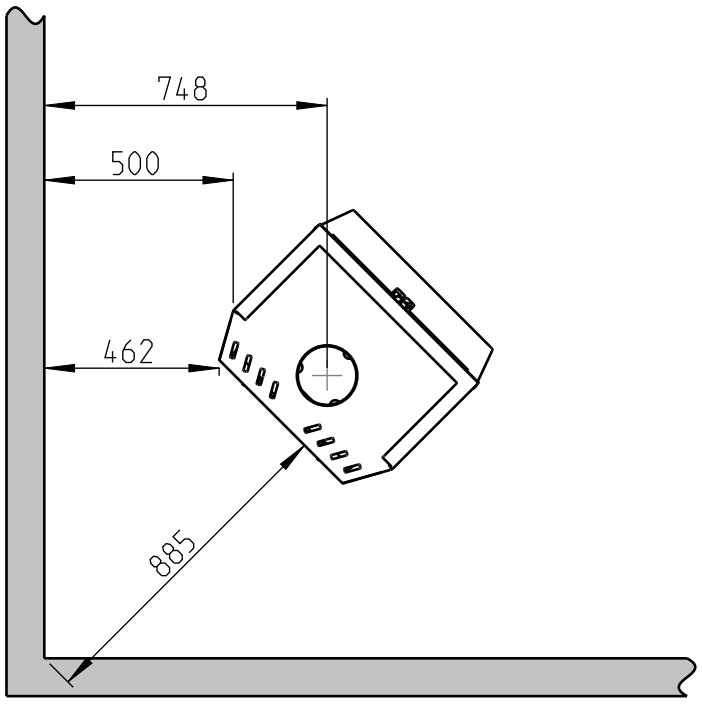

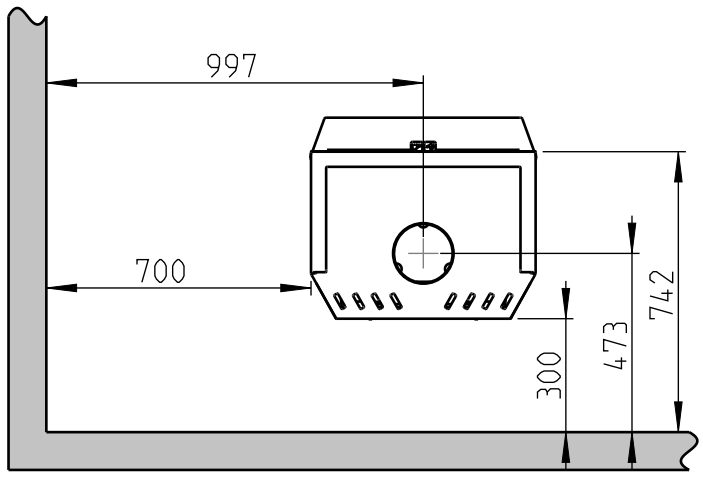

F 520 / F 520 LB / F 520 HT

With retrofitted cast iron side

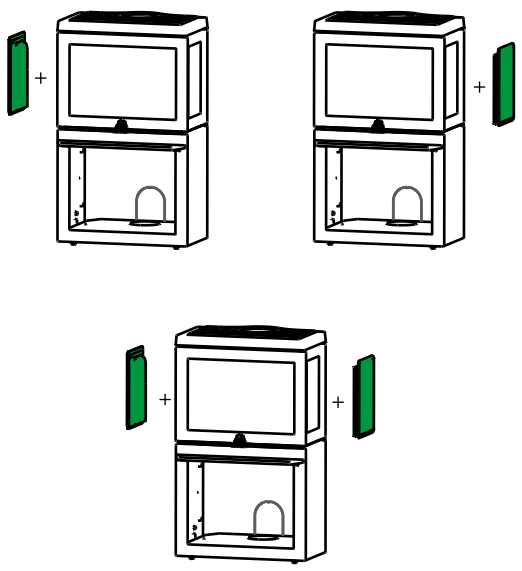

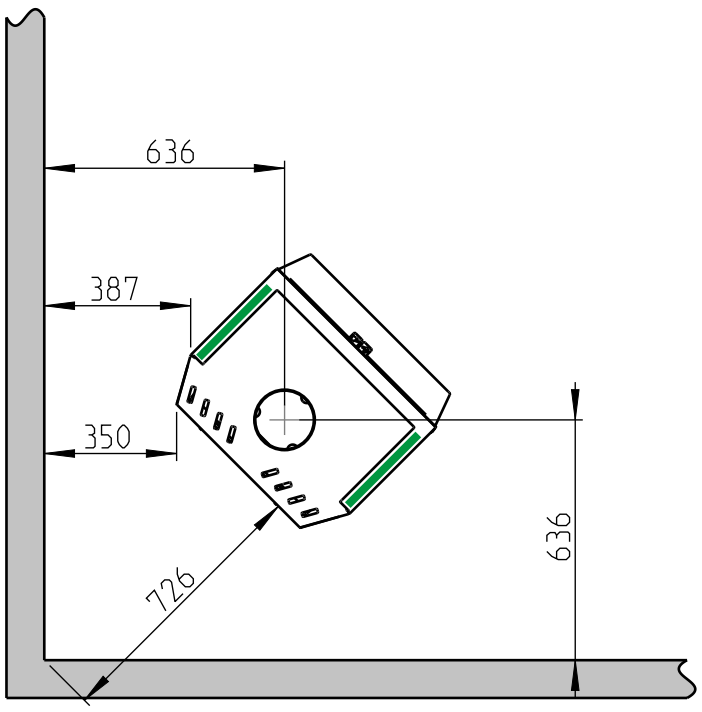

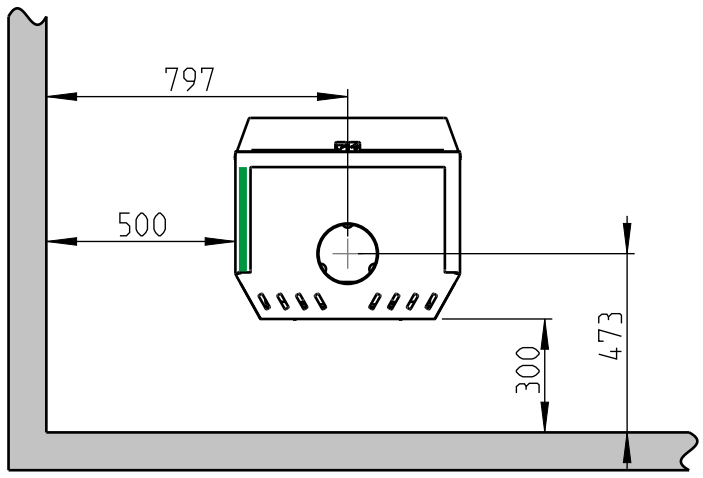

F 520 / F 520 LB / F 520 HT

- With retrofitted cast iron side and convection kit side
- With retrofitted convection kit rear

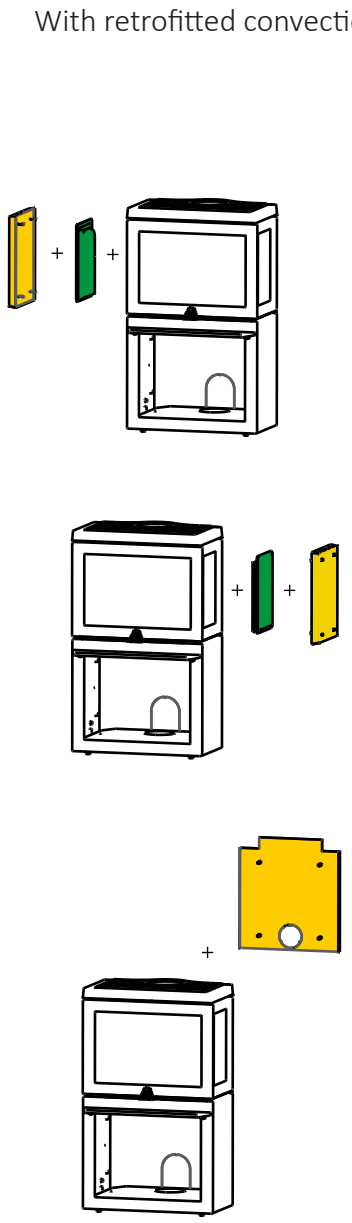



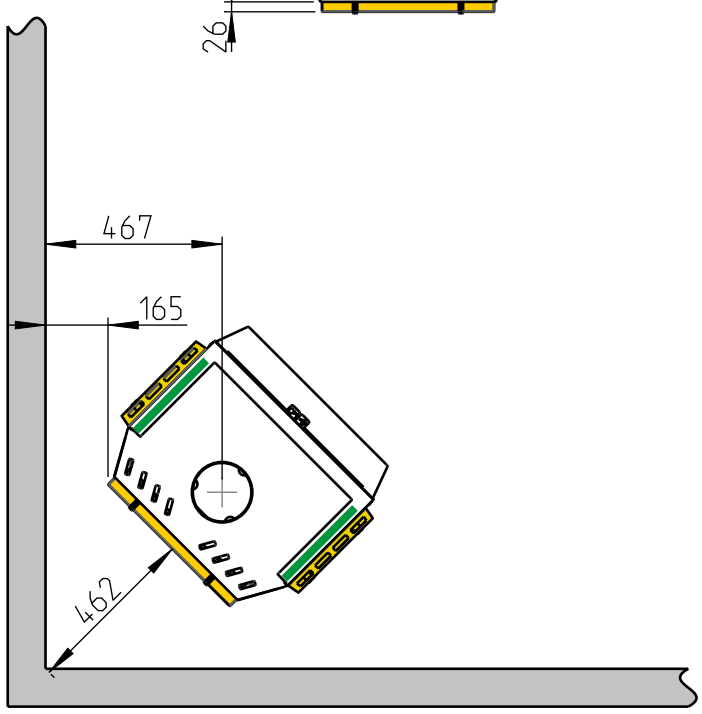

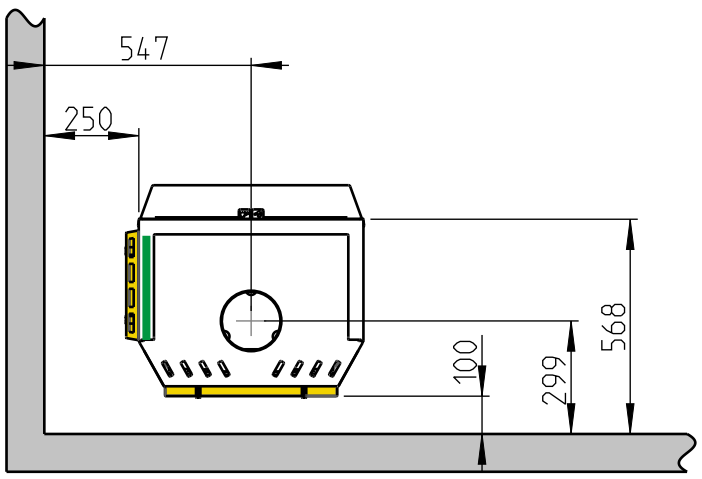

F 520 / F 520 LB / F 520 HT: Minimum distance to combustible wall protected by approved fireproof wall

With semi-insulated chimney/shielded flue pipe all the way down to the product

Combustible wall

Firewall



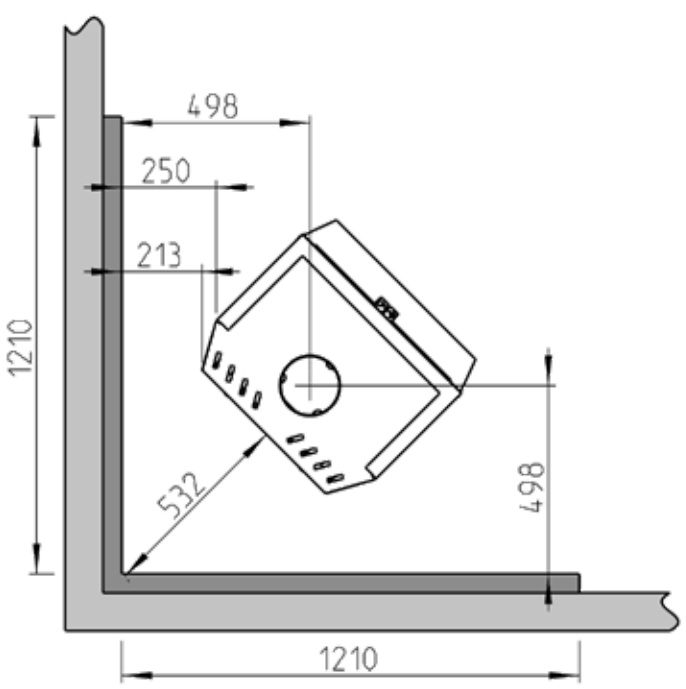

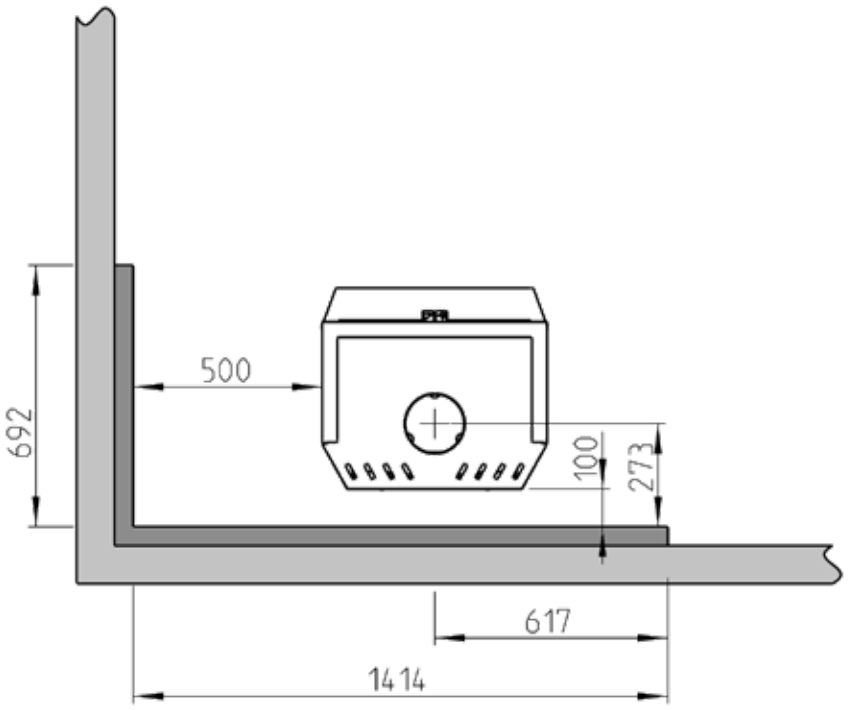

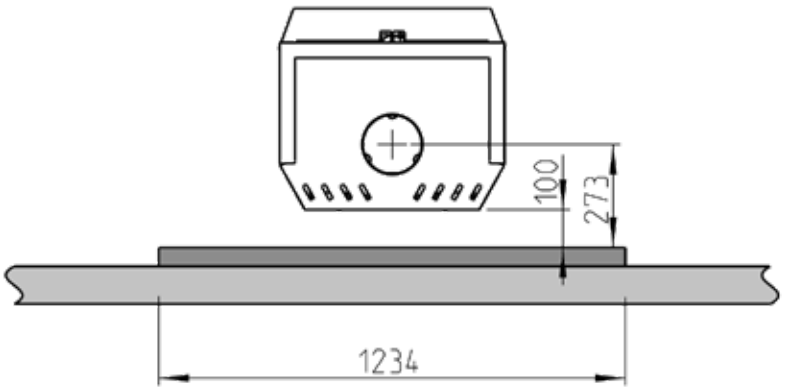

F 520 / F 520 LB / F 520 High Top:

With retrofitted cast iron side

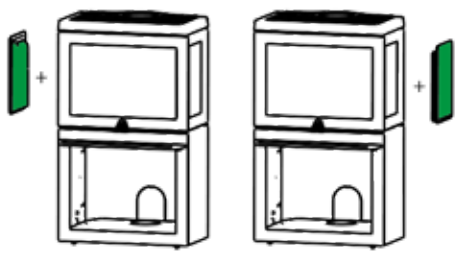

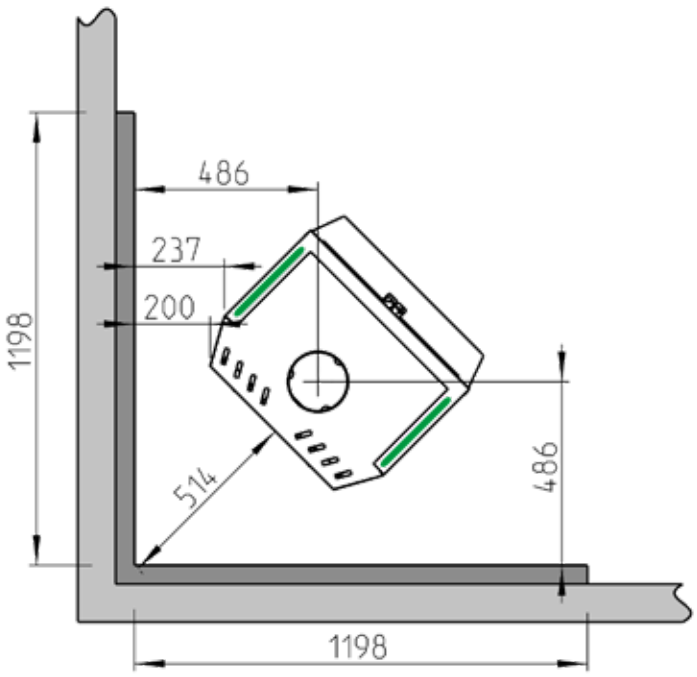

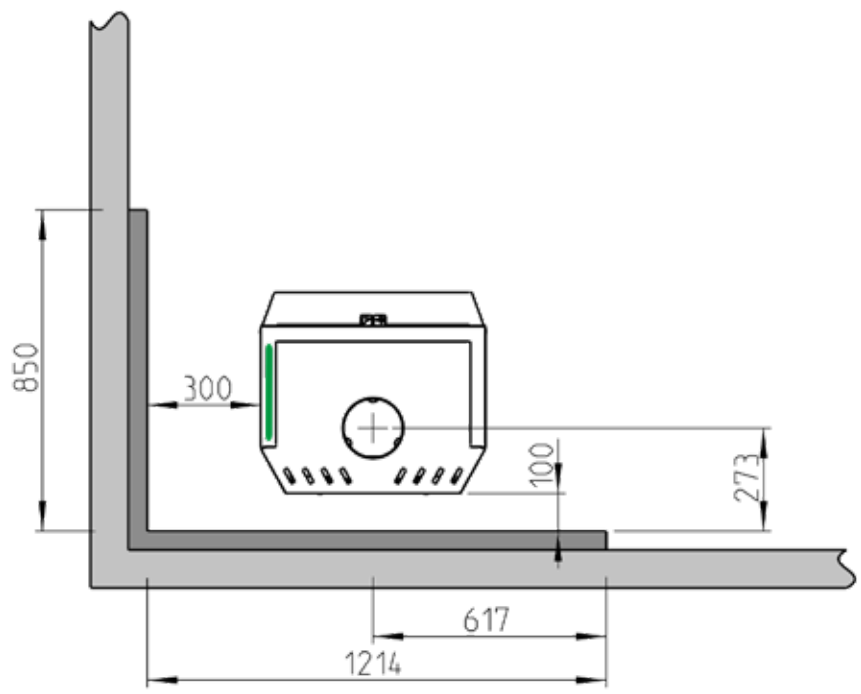



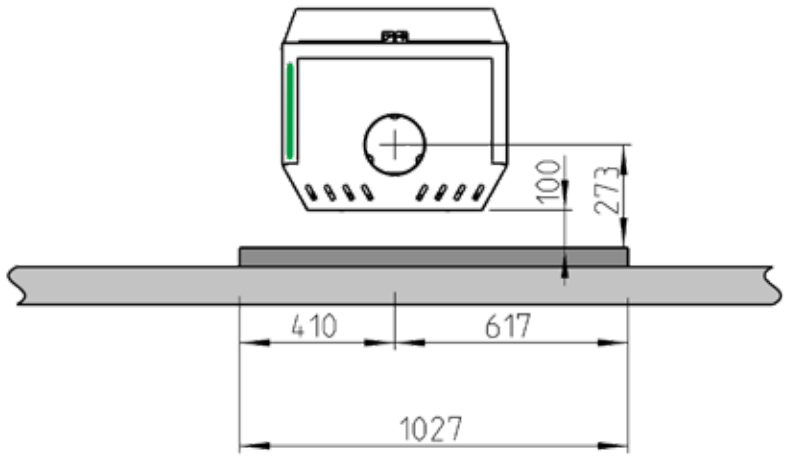

900187-P06